

Mandatory functional programming project

Hans Rischel

(Revised by Michael R. Hansen 2009, 2010 and 26/9 2011)

This is the first mandatory assignment out of two. It must be handed in an approved. The other mandatory assignment will be handed out in the first part of November.

- You solution should be handed in **no later than Monday, October 10, 2011**.
- The mandatory assignments can be solved individually or in groups of 2 or 3 students. If the students in a group do not contribute equally, the role of each student must be explicitly stated in the report.
- You hand in your solution as follows: **One** member of each group must hand in the assignment using the "Assignments" ("Opgaver") link in the course group on CampusNet. The following files must be uploaded:
 - A PDF-file 'assignment1.pdf' containing just **one** page with the **names and study numbers for all members of the group**. This page must also contain:
 - * The main type declarations and types for functions, with the purpose of giving an overview of your program 'curve.fs'.
 - A file 'curve.fs' containing your F#-program for piecewise linear curves.
 - A file 'spaceFilling.fs', containing your F#-functions for generating Hilbert, Peano and Sierpinski curves.
 - A number of properly named ps-files resulting from using your space-filling functions.

In this project you shall construct a library for manipulating piecewise linear curves in a functional programming language. Furthermore, you should apply this library in order to produces examples of so-called *space-filling curves*: Hilbert curves, Peano Curves and Sierpinski curves.

In the problem formulation below, you are asked make a function to generate *PostScript* files from curves. (The principle for doing so is described as well.) Thereby, you can look at the curves using the program "Ghostview". You can also use an Adobe pdf-reader, since that reader will convert PostScript files to pdf format.

Aim at solving the problem in a succinct, elegant and understandable manner. Your solution will be evaluated on these terms and correctness – not on efficiency. It is recommended that you use higher-order functions on lists in your solution, to the extend this is appropriate.

Problem

You will make a library of F# functions for manipulation and drawing of piecewise linear curves. Such a curve is drawn as a sequence of segments $P_1P_2, P_2P_3, \dots, P_{n-1}P_n$ where P_1, P_2, \dots, P_n are points in the plane. The point P_1 is called the *start point* of the curve, and the point P_n is called the *end point* of the curve. We use usual rectangular, Cartesian coordinates in the plane, so points and vectors in the plane are represented by coordinates which are pairs of real numbers. The point with coordinates $(0.0, 0.0)$ is called the *origin* of the plane.

You will make the following functions on curves:

point Computes the curve with start point and end point equal to a given point.

line Computes the curve P_1P_2 from the points P_1 and P_2 .

join For given curves c_1 and c_2 , this function computes the curve c consisting of three parts: (1) the curve c_1 , (2) the segment from the end point of c_1 to the start point of c_2 , and (3) the curve c_2 .

trans For given curve c and vector \mathbf{v} , this function computes the curve obtained from c under the parallel translation in the plane determined by the vector \mathbf{v} .

rot For given curve c and angle t , this function computes the curve c' obtained from c under the rotation of angle t around the origin of the coordinate system.

reflect1 For given curve c , this function computes the curve c' obtained from c by reflection in the first axis of the coordinate system.

reflect2 For given curve c , this function computes the curve c' obtained from c by reflection in second axis of the coordinate system.

scale For given curve c and real number c , this function computes the curve c' obtained from c by multiplication by factor c from the origin of the coordinate system.

size1 Horizontal size of the curve, i.e. the difference between the largest and smallest first coordinates for points of the curve.

size2 Vertical size of the curve, i.e. the difference between the largest and smallest second coordinates for points of the curve.

draw Outputs the curve to a file on the disk in *PostScript* format (cf. the remarks below).

Points and vectors in the plane. Rotation and multiplication

Points and vectors in the plane are given by their coordinates which are pairs of real numbers.

The *translation* determined by a vector $\mathbf{v} = (v_1, v_2)$ maps a point P with coordinates (x, y) into the point P' with coordinates (x', y') where:

$$\begin{aligned}x' &= x + v_1 \\y' &= y + v_2\end{aligned}$$

The rotation of angle t (where t is a real number) around the origin maps a point P with coordinates (x, y) into the point P' with coordinates (x', y') where:

$$\begin{aligned}x' &= x \cos t - y \sin t \\y' &= x \sin t + y \cos t\end{aligned}$$

You may use the value `System.Math.PI` for the mathematical constant π when converting between radians and degrees.

The *reflection* in the first axis of the coordinate system maps a point P with coordinates (x, y) into the point P' with coordinates $(x', y') = (x, -y)$.

The *reflection* in the second axis of the coordinate system maps a point P with coordinates (x, y) into the point P' with coordinates $(x', y') = (-x, y)$.

The *multiplication* by factor c from the origin of the coordinate system maps a point P with coordinates (x, y) into the point P' with coordinates $(x', y') = (c x, c y)$.

Output of a curve. PostScript form

The language *PostScript* is used for representing printed pages (containing graphics). The curve consisting of the segments joining the points (10.0, 20.0), (40.0, 50.0) and (70.0, 80.0) may e.g. be represented by the following PostScript instructions:

```
%!  
1 1 scale  
newpath  
10 20 moveto  
40 50 lineto  
70 80 lineto  
stroke  
showpage
```

Apart from the initial and final conjurations (to please the PostScript interpreter) there has to be a PostScript `moveto` command containing the coordinates of the start point plus PostScript `lineto` commands containing the coordinates of each subsequent point of the curve.

Note that the coordinates are *positive integers*. You will hence have to make a conversion from real-valued coordinates to integers, and the parts of the curve corresponding to negative coordinate values can not be printed.

When programming the function **draw** it is convenient to use an auxiliary function building the string which represents the curve in PostScript form.

One may then use the function `stringToFile: string -> string -> unit` declared below to output a string (second argument) to a file (first argument) on the disk:

```
let stringToFile filename s
  = System.IO.File.WriteAllText(__SOURCE_DIRECTORY__ + "\\\" + filename, s);;
```

The effect of executing `stringToFile filename s` is that the *current directory* contains a file *filename* with the contents *s*.

NB: Note that this function will overwrite an existing file “*filename*”.

A file in PostScript format can be output directly on the laser printer in the data bar as the printer will interpret the commands and make the corresponding drawing. The point with coordinates (0,0) corresponds to the lower left corner of the sheet while 72 units correspond to one US inch.

A file (with extension `.ps`) in PostScript format may be shown on the screen using the “ghostview” program. You can also use an Adobe pdf-reader, since that reader will convert PostScript files to pdf format.


Applications

The functions should be used to program functions for Hilbert curves, Peano curves and Sierpinski curves – as described in the following.

When drawing these curves using the function **draw**, one should first obtain a suitable scale and placement of the curve by using the functions **scale** and **trans**.

Hilbert curves

The Hilbert curves h_0, h_1, h_2, \dots are a system of curves, where the curve h_{n+1} is formed by connecting 4 curves $h_{n1}, h_{n2}, h_{n3}, h_{n4}$ which are obtained from the curve h_n by transformations composed of reflections, rotations and translations. The figure shows the Hilbert curves h_0, h_1, h_2 and h_3 and how the curves h_1, h_2 and h_3 are composed of four parts:

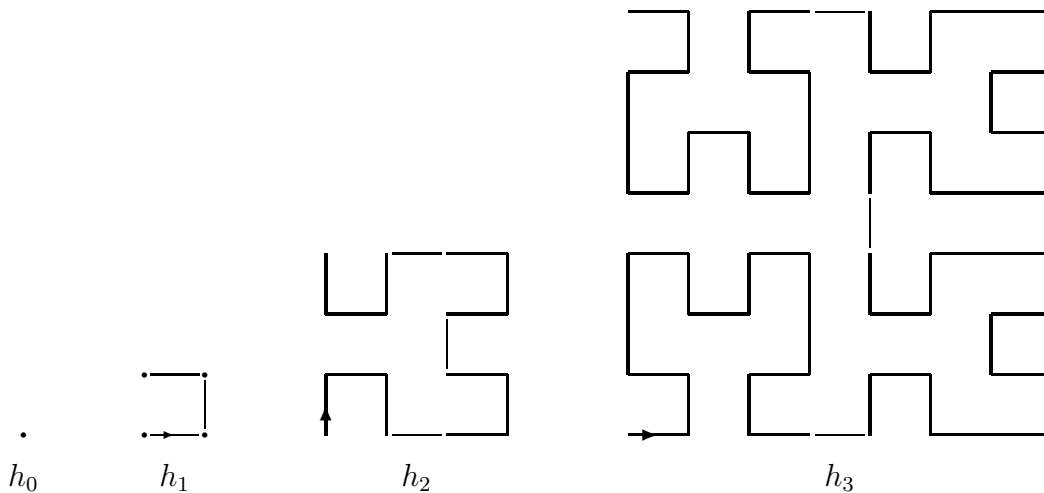


All curves start in the origin and the connecting segments (thin lines in the Figure) are of length 1.

Declare the function **hilbert** which computes the curve h_{n+1} from the curve h_n for any n . Use this function to make a program drawing the curve h_4 (in a suitable scale).


Peano curves

The Peano curves p_0, p_1, p_2, \dots are a system of curves, where the curve p_{n+1} is obtained by connecting 9 curves $p_{n1}, p_{n2}, \dots, p_{n9}$ which are obtained from the curve p_n by transformations composed of reflections, rotations and translations. The figure shows the Peano curves p_0, p_1 or p_2 and how the curves p_1 and p_2 are composed of 9 parts. All curves start in the origin and the connecting segments (thin lines in the Figure) are of length 1.

Declare the function **peano** which computes the curve p_{n+1} from the curve p_n for any n . Use this function to make a program drawing the curve p_3 (in a suitable scale). (It may be convenient to collect the 9 curves p_{n1}, \dots, p_{n9} in 3 groups each consisting of 3 curves.)

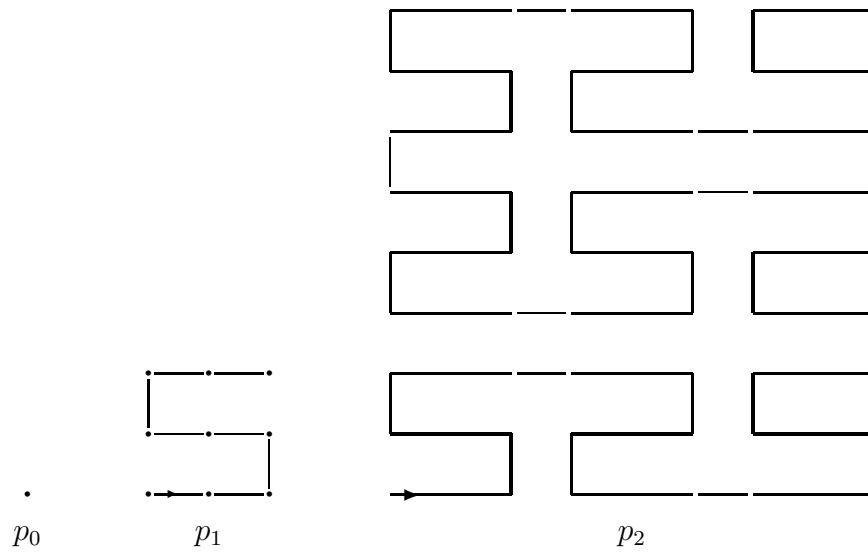

Sierpinski curves

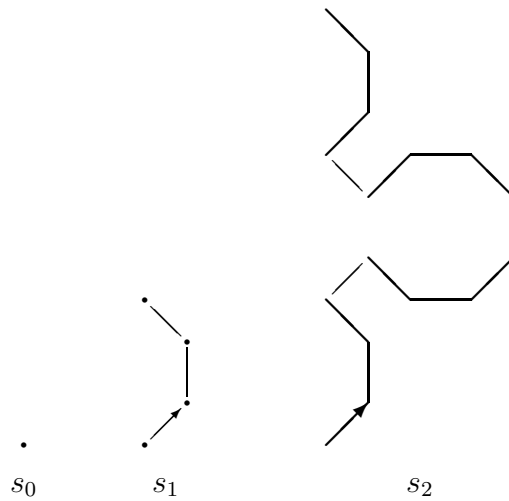

The Sierpinski curves s_0, s_1, s_2, \dots are a system of curves, where the curve s_{n+1} is obtained by connecting four curves $s_{n1}, s_{n2}, s_{n3}, s_{n4}$ which are obtained from the curve s_n by transformations composed of reflections, rotations and translations. The figure shows the Sierpinski curves s_0, s_1 and s_2 and how the curves s_1 and s_2 are composed of four parts. Note that all segments in a Sierpinski curve have same length. All curves start in the origin and the connecting segments (thin lines in the Figure) are of length 1.

Declare the function **sierpinski** which computes the curve s_{n+1} from the curve s_n for any n , and use this function to make a program drawing the curve s_4 (in a suitable scale).